

# VOLVO PENTA INDUSTRIAL DIESEL

# TAD1643VE

565 kW (768 hp) crankshaft power acc. to ISO 3046

The TAD1643VE is a powerful, reliable and economical Versatile Diesel Engine built on the dependable Volvo in-line six design.

## Durability & low noise

Designed for the easiest, fastest and most economical installation. Well balanced to produce smooth and vibration-free operation with low noise level, featured with high torque.

To maintain a controlled working temperature in cylinders and combustion chambers, the engine is equipped with piston cooling. The engine is also fitted with replaceable cylinder liners and valve seats / guides to ensure maximum durability and service life of the engine.

## Operational economy and Low exhaust emission

The state of the art, high-tech injection and air charging system with low internal losses contributes to excellent combustion and low fuel consumption.

## Easy service & maintenance

Easily accessible service and maintenance points contribute to the ease of service of the engine.


## Technical description:

### Engine and block

- Optimized cast iron cylinder block with optimum distribution of forces without the block being unnecessary heavy.
- Wet, replaceable cylinder liners
- Piston cooling for low thermal load on pistons and reduced ring temperature
- Tapered connecting rods to reduce risk of piston cracking
- Crankshaft has induction hardened bearing surfaces and fillets with seven main bearings for moderate load on main and big-end bearings
- Nitrocarburized transmission gears for heavy duty operation
- Keystone top compression rings for long service life
- Viscous type crankshaft vibration damper
- Replaceable valve guides and valve seats
- Overhead camshaft and four valves per cylinder equipped with camshaft damper to reduce noise and vibrations.

### Lubrication system

- Full flow oil cooler
- Full flow disposable spin-on oil filters
- The lubricating oil level can be measured during operation (Standard dipstick only)
- Gear type lubricating oil pump, gear driven by the transmission

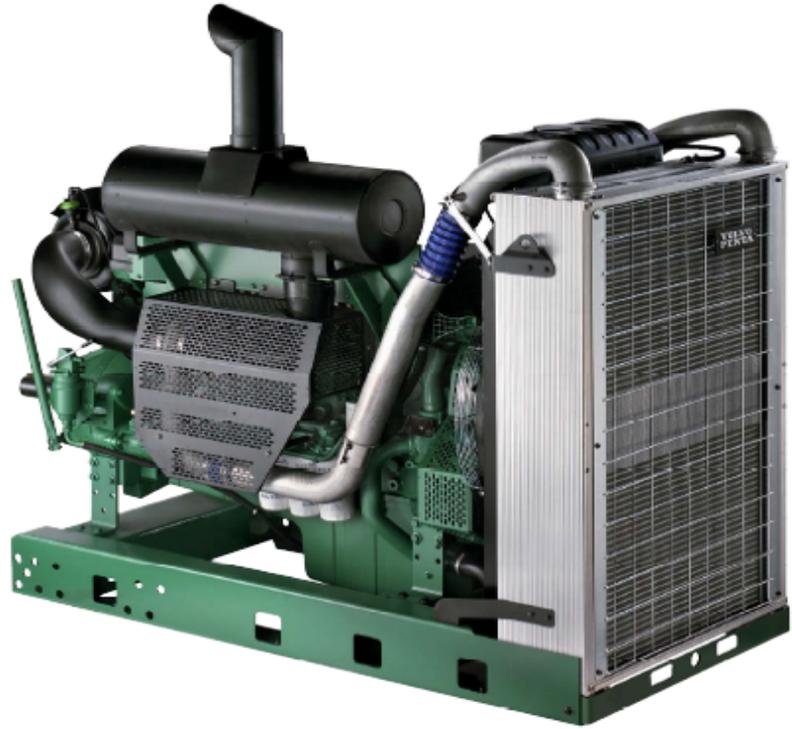

## Features

- High torque
- Air to air intercooler
- Fully electronic with Volvo Penta EMS 2
- High power density
- Low noise levels

### Fuel system

- Self de-aerating system. When replacing filters all fuel stays in the engine.
- Non-return fuel valve
- Electronic Unit Injectors
- Fuel prefilter with water separator and water-in-fuel indicator / alarm
- Gear driven low-pressure fuel pump
- Fuel pressure switch

### Turbocharger

- Efficient and reliable turbo charger

### Cooling system

- Air to air intercooler
- Belt driven, maintenance-free coolant pump with high degree of efficiency
- Efficient cooling with accurate coolant control through a water distribution duct in the cylinder block. Reliable sleeve thermostat with minimum pressure drop
- Tropical radiator
- Radiator guard
- Fan hub
- Suction type fan, 890 mm
- Fan & belt guard

### Electrical system

- Engine Management System 2 (EMS 2), an electronically controlled processing system which optimizes engine performance. It also includes advanced facilities for diagnostics and fault tracing
- The instruments and controls connects to the engine via the CAN SAE J1939 interface, either through the Control Interface Unit (CIU) or the Digital Control Unit (DCU). The CIU converts the digital CAN bus signal to an analog signal, making it possible to connect a variety of instruments. The DCU is a control panel with display, engine control, monitoring, alarm, parameter setting and diagnostic functions. The DCU also presents error codes.
- Sensors for oil pressure, oil temp, boost pressure, boost temp, coolant temp, water in fuel, fuel pressure and two speed sensors. Crank case pressure, piston cooling pressure, oil level and air filter pressure drop sensors.
- Alternator 24V / 80A

**VOLVO  
PENTA**

# TAD1643VE

## Technical Data

### General

Engine designation .....	TAD1643VE
No. of cylinders and configuration.....	in-line 6
Method of operation .....	4-stroke
Bore, mm (in.).....	144 (5.67)
Stroke, mm (in.).....	165 (6.50)
Displacement, l (in <sup>3</sup> ).....	16.12 (984)
Compression ratio.....	17.5:1
Dry weight, kg (lb).....	1440 (3175)
With Power Pac, kg (lb).....	1840 (4057)
Wet weight, kg (lb).....	1510 (3329)
With Power Pac, kg (lb).....	2000 (4409)

### Performance

IFN Power, without fan, at 1850 rpm, kW (hp) .....	565 (768)
IFN Power, with fan Ø890mm, at 1850 rpm, kW (hp) .....	543 (738)
Mean piston speed at 1850 rpm, m/s (ft/s) .....	10.2 (33.4)
Effective mean pressure at 1850 rpm, MPa (psi).....	2.27 (330)
Max combustion pressure at 1850 rpm, MPa (psi) .....	16.7 (2422)

### Lubrication system

Oil consumption at max rpm, l/h (US gal/h) .....	0.10 (0.026)
Oil system capacity incl filters, liter (US gal).....	48 (12.7)
Oil change intervals at specification	

VDS-2, h.....	600
VDS, ACEA E3, h.....	400
ACEA E2, API CF, CF-4, CG-4, h .....	200

### Intake and exhaust system

Air consumption, m <sup>3</sup> /min (cfm).....	43 (1529)
Max allowable air intake restriction, kPa (In wc).....	5 (20.1)
Exhaust gas temperature after turbine, °C (°F) .....	508 (946)
Max allowable back-pressure in exhaust line, kPa (In wc).....	15 (60.2)
Exhaust gas smoke, Bosch units.....	0.45

### Standard Equipment

#### Engine

Automatic belt tensioner	•	•
Lift eyelets	•	•
Flywheel housing with conn. acc. to SAE 1	•	•
Flywheel for 14" flex. plate and flexible coupling	•	•
Vibration dampers	•	•

#### Engine suspension

Fixed front suspension	•	•
------------------------	---	---

#### Lubrication system

Oil dipstick	•	•
Full-flow oil filter of spin-on type	•	•
By-pass oil filter of spin-on type	•	•
Oil cooler, side mounted	•	•
Low noise oil sump	•	•

#### Fuel system

Fuel filters of disposable type	•	•
Electronic unit injectors	•	•
Pre-filter with water separator	•	•

#### Intake and exhaust system

Air filter without rain cover	•	•
Air filter with replaceable paper insert	•	•
Air restriction indicator	•	•
Air cooled exhaust manifold	•	•
Connecting flange for exhaust pipe	•	•
Exhaust flange with v-clamp	•	•
Turbo charger, low right side	•	•
Crankcase ventilation	•	•

#### Cooling system

Radiator 1,3 m <sup>2</sup> including intercooler	-	•
Belt driven coolant pump	•	•
Fan hub	•	•
Suction fan	-	•
Fan guard	-	•
Belt guard	-	•

#### Control system

Engine Management System 2(EMS 2) with CAN-bus interface SAE J1939	•	•
Digital Control Unit (DCU)	-	•

#### Alternator

Alternator 80A / 24 V	•	•
-----------------------	---	---

#### Starting system

Starter motor, 7.0kW, 24 V	•	•
Connection facility for extra starter motor	•	•

#### Instruments and senders

Temp.- and oil pressure for automatic stop/alarm	•	•
--	---	---


#### Other equipment

Expandable base frame	-	•
-----------------------	---	---

#### Engine Packing

Plastic wrapping	•	•
------------------	---	---

- optional equipment or not applicable  
• included in standard specification

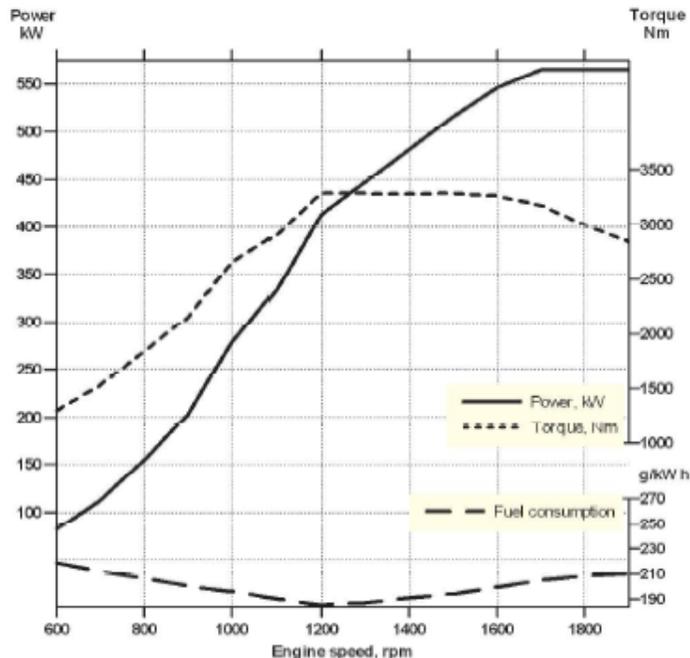

Note! Not all models, standard equipment and accessories are available in all countries. All specifications are subject to change without notice. The engine illustrated may not be entirely identical to production standard engines.

### Power Standards

The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271. The technical data applies to an engine without cooling fan and operating on a fuel with calorific value of 42,7 MJ/kg (18360 BTU/lb) and a density of 0.84 kg/litre (7.01 lb/US gal, 8.42 lb/imp gal), also where this involves a deviation from the standards.

### Rating Guideline

IFN Power rating corresponds to ISO Overload Power. It is intended for applications where intermittent power is

utilized less than 1 hour within any period of 12 hours of continuous operation. The average load factor must not exceed the continuous rating.

ICFN Power rating corresponds to ISO Standard Power for continuous operation. It is intended for constant load applications with uninterrupted service at full load for extended periods of time. The average load factor must not exceed 70% of the continuous rating, when operating at continuous speed and load.


# VOLVO PENTA

AB Volvo Penta  
SE-405 08 Göteborg, Sweden  
www.volvopenta.com

# Cornell Pump Curve – 8NHTH

Performances shown are for S.G. 1.0  
60°F water, frame mounted configuration.  
Other mounting styles or S.G.  
may require curve adjustments.

Speed	Impeller Dia.	Style	Volute	Solids Dia.	N <sub>s</sub>	Suction	Discharge	No. Vanes
VARIOUS	21.95"	ENCLOSED	DOUBLE	4"	1750	10"	8"	2

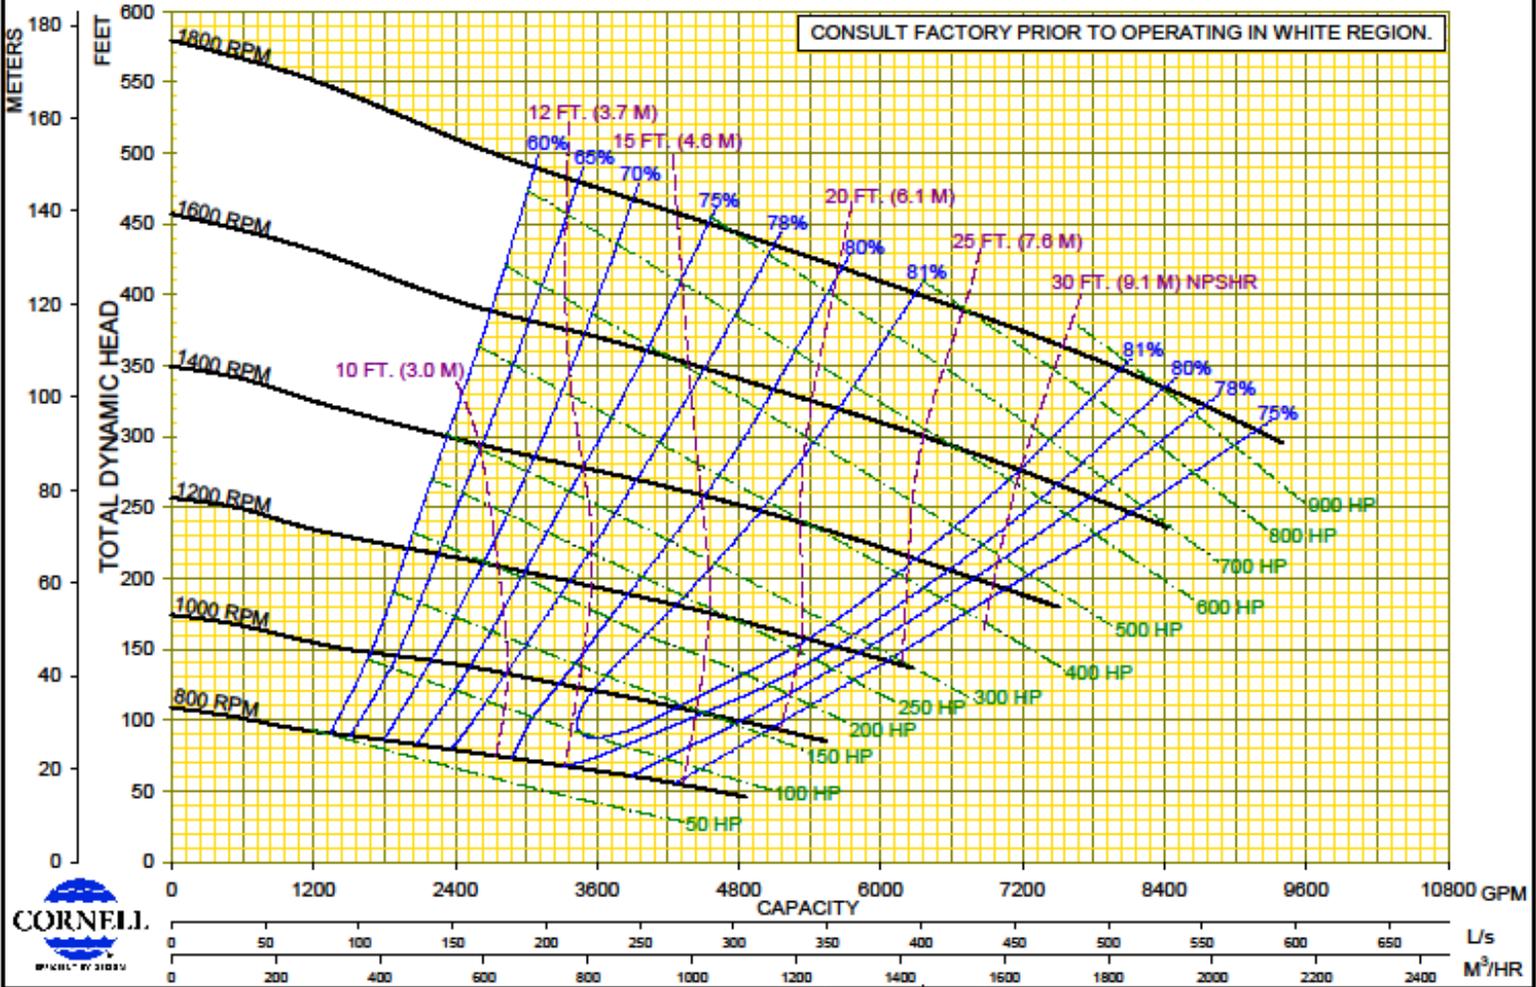

Cornell Pump Company • Clackamas, Oregon	02	09/24/25	KA/AL	MODEL : 8NHTH	CURVE NO: <b>8NHTHVA</b>
	00	10/29/14	--	TYPE : SOLIDS HANDLING	

## TIGER INDUSTRIAL RENTALS

24 hour dispatch 1-888-866-0047 | International 001-409-832-9336 | [www.TigerIndustrialRentals.com](http://www.TigerIndustrialRentals.com)  
 LOCATIONS: BEAUMONT, TX | SULPHUR, LA | LA PORTE, TX | VICTORIA, TX | DILLEY, TX | MIDLAND, TX

- 768 HP Volvo Engine – Tier II
- Pump 122061
  - Cornell Pump End (8NHTH)



February 23, 2026 | 5

## TIGER INDUSTRIAL RENTALS

24 hour dispatch 1-888-866-0047 | International 001-409-832-9336 | [www.TigerIndustrialRentals.com](http://www.TigerIndustrialRentals.com)  
LOCATIONS: BEAUMONT, TX | SULPHUR, LA | LA PORTE, TX | VICTORIA, TX | DILLEY, TX | MIDLAND, TX

- 768 HP Volvo Engine – Tier II
- Pump 122061
  - Cornell Pump End (8NHTH)



## TIGER INDUSTRIAL RENTALS